Town of Legal Governance & Priorities Committee Meeting September 22, 2025 7:00 PM Council Chambers

AGENDA

Call to Order with acknowledgement of meeting on Treaty 6 Territory

Additions and/or Deletions

Purpose of Meeting

- 1. SVF Sports Centre Tour
- 2. Darcy Brisson & Duane Hudec, Citadel Ball Diamond Score Clock (8:00 P.M.)
- 3. SVF Sports Centre Grand Opening (Discussion)
- 4. Staff Christmas Party (Discussion)
- 5. Closed Session "Personnel" (Municipal Government Act (Section 1(3)(c)) and the Access to Information Act (S.A. 2024, c.A-1.4, Section 22))

Adjournment

From: HUDEC Duane

Sent: Friday, September 19, 2025 9:46 AM **To:** Christine Young <cyoung@legal.ca>

Subject: Re: Scoreboard Info

We have Jason Mahe that will be doing the electrical work. There is power already on the left field side of the fence. JP is working with Rich Laplante to use his trencher to run the power about 250 from the power junction box in the corner of the left field towards center field. We are planning on putting in screw piles and installing channel beams to the screw piles. Cory Hills will be helping us with materials and welding. Once we have the board and can actually see it I will have a better idea on how we will be lifting it in place. Let me know if you need anything else.


Thanks

Duane Hudec







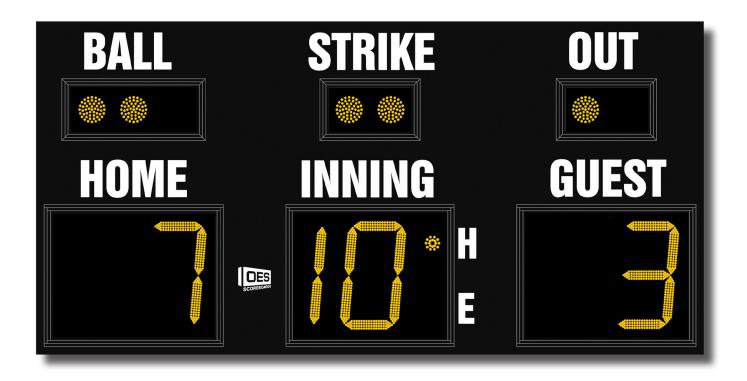

SCOREBOARD	VIDEO DISPLAY	ACCENTS	COLOR NOTES	CONCEPT APPROVAL:
Model: M7109BUCV			Enclosure: Black	Version: 1
Dimensions: 9'W x 4'6"H			LEDs: Amber	Date: July 2025
			Vinyl: White #101	Signature:












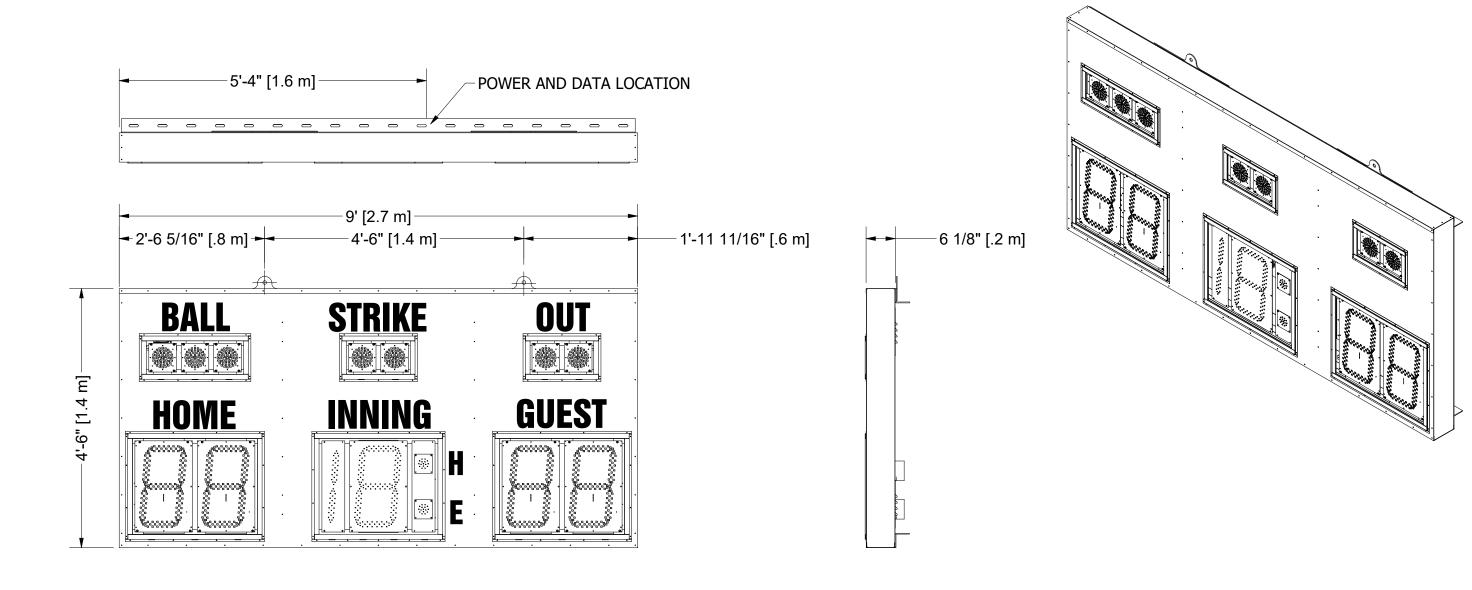

Scoreboard Specifications

Overall size: 9' (W) x 4'6" (H) x 6" (D) Approximate Weight: 212 lbs

17" LED Digits for (HOME, GUEST, INNING) 4" for LED Dots for (BALL, STRIKE, OUT) 2" for LED Dots for (H, E)

6" White Vinyl Lettering for BALL, STRIKE, OUT, HOME, GUEST, INNING 5" White Vinyl Lettering for H, E

All LED digits include the following:

- *Shatter Resistant Lexan cover
- *Conformal coating to protect from environmental conditions
- *Surface Mount Technology LEDs allowing for wide viewing angle

ELECTRICAL SPECIFICATIONS

Electrical Ratings:

- AC Mains Voltage/Freq: 120VAC (+/-10%) 1 Phase, 2 Wire / 60Hz. Requires an earth ground connection.
- MAX Current: 6.2 Amps
- AC Current Rating of Fuse or Circuit Breaker within SB: 8 Amps

Incoming AC Mains (Power Cord) and Data Location: Behind the INNING of the Scoreboard.

Overcurrent Branch Circuit Protection supplying the scoreboard to be determined by customer in accordance with all local electrical codes.

REVISION HISTORY						
REV	DESCRIPTION	DATE	AUTHOR			
Α	INITIAL DESIGN	2022-08-19	M.LI			
В	UPDATE INNING DIGITS	2022-11-15	RDonald			
С	UPDATED WEIGHT	2025-01-10	WVM			

4056 Blakie Road, London, ON, N6L 1P7 Tel: (519) 652-5833 Fax: (519) 652-3795 Email: oes@oes-inc.com

OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWINGS INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES INC.

NOTICE TO PERSON RECEIVING THIS DRAWING AND

TOLERANCE INFORMATION imensions are in inches

ractional ± 1/16" hree Place Decimals ± 0.005"

THIRD ANGLE PROJECTION


SIZE FILENAME 7109BOCV-INFO.idw B USAGE


7109BOXV-INFO 2022-08-19 REV


USE FOR REVIEW


OES ELECTRONIC SCOREBOARDS

SCALE NTS PAGE 1 OF 1 DRAWN BY M.LI

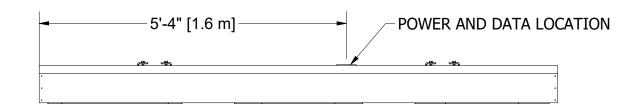

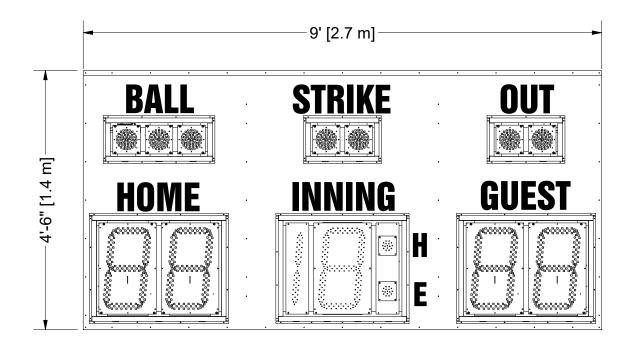

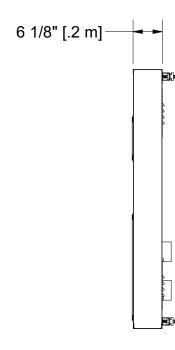

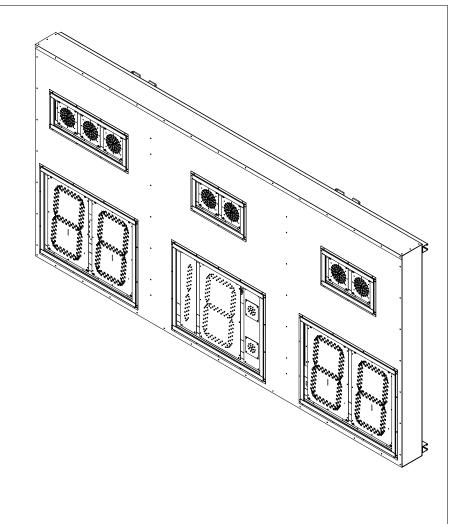

Scoreboard Specifications

Overall size: 9' (W) x 4'6" (H) x 6" (D) Approximate Weight: 167 lbs

17" LED Digits for (HOME, GUEST, INNING) 4" for LED Dots for (BALL, STRIKE, OUT) 2" for LED Dots for (H, E)

6" White Vinyl Lettering for BALL, STRIKE, OUT, HOME, GUEST, INNING 5" White Vinyl Lettering for H, E

All LED digits include the following:

- *Shatter Resistant Lexan cover
- *Conformal coating to protect from environmental conditions
- *Surface Mount Technology LEDs allowing for wide viewing angle

ELECTRICAL SPECIFICATIONS

Electrical Ratings:

- AC Mains Voltage/Freq: 120VAC (+/-10%) 1 Phase, 2 Wire / 60Hz. Requires an earth ground connection.
- MAX Current: 6.2 Amps
- AC Current Rating of Fuse or Circuit Breaker within SB: 8 Amps

Incoming AC Mains (Power Cord) and Data Location: Behind the INNING of the Scoreboard.

Overcurrent Branch Circuit Protection supplying the scoreboard to be determined by customer in accordance with all local electrical codes.

REVISION HISTORY						
REV	DESCRIPTION	DATE	AUTHOR			
Α	INITIAL DESIGN	2022-08-19	M.LI			
В	UPDATE INNING DIGITS	2022-11-15	RDonald			
С	UPDATED WEIGHT	2025-01-10	WVM			

NOTICE TO PERSON RECEIVING THIS DRAWING AND

OES INC. CLAIMS PROPERTY RIGHTS TO THE MATERIAL DISCLOSED HEREIN. THIS DRAWINGS INCLUDES UNPUBLISHED PROPRIETARY MATERIAL DEVELOPED BY OES INC. AND AS SUCH IS NOT TO BE COPIED, REPRODUCED OR USED IN ANY WAY WITHOUT PRIOR WRITTEN AUTHORIZATION FROM OES INC.

TOLERANCE INFORMATION imensions are in inches

ractional ± 1/16" hree Place Decimals ± 0.005"





SIZE FILENAME 7109BUCV-INFO.idw B USAGE

2022-08-19 C

4056 Blakie Road,

London, ON, N6L 1P7 Tel: (519) 652-5833

Email: oes@oes-inc.com

Fax: (519) 652-3795

USE FOR REVIEW

SCALE NTS DRAWN BY M.LI

PAGE 1 OF 1